


ELASTEC PACS 424

Trailer Mounted Vacuum System



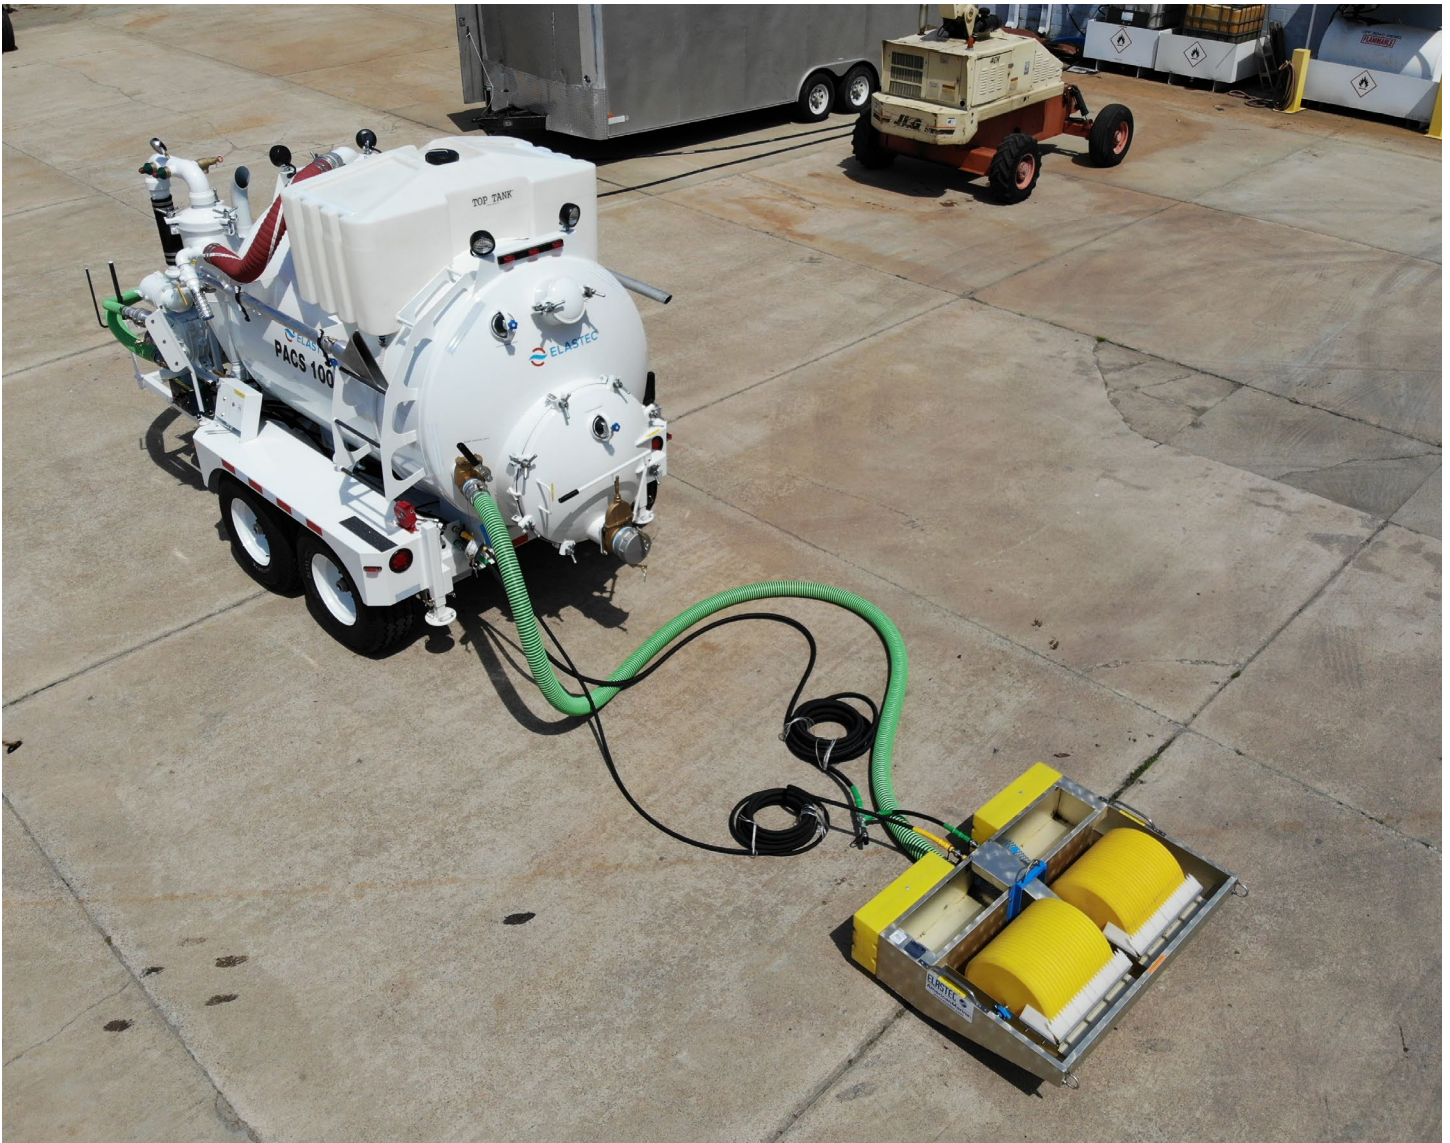

Specification

Tank Capacity	1,000 gallons / 3,785 litres
Chassis	Trailer
Vacuum Tank Elevate	Included
Engine	37 hp / 28 kW Diesel Tier 4 (Tier 3 optional*)
Vacuum Pump Type	Water Cooled Vane
Airflow (pulling vacuum)	324 cfm @ 18 Hg
Airflow (free air)	424 cfm
Vacuum Clutch	Yes
Pressurize Tank Facility	Yes
Rear Door	36 inch / 0.91 m
High Pressure Water System	Optional
E150 Transfer Pump	Optional
Drum Skimmer	Optional
Dry Particulate Filter	N/A
ShovelHead Skimmer	Optional
Empty Weight	5,930 lb / 2,689 kg
Gross Weight	16,000 lb / 7,257 kg
Dimensions (LxWxH)	219 x 86.5 x 99.5 inch 556 x 220 x 253 cm

*Tier restrictions may apply.

Equipped with a 37 hp / 28 kW diesel engine driving a Water Cooled Vacuum pump, capable of sustaining continuous levels of high vacuum without overheating. Free air 424 cfm / 324 under load, max vacuum 90% / 27 inch, max continuous vacuum 83% / 25 inch. Engine fitted with Spark Arrestor. Static grounding wire.

Standard Accessories

Two 3 inch x 20 ft/6 m hoses
One 2 inch x 20 ft/6 m hose
Suction wand and 3x6 inch camlock coupler

Optional

Spares kit, E150 Submersible Pump, hydraulically operated drum skimmer, high pressure water pump and tank



1309 West Main St.
Carmi, Illinois 62821, USA
+1 (618) 382-2525
www.elastec.com elastec@elastec.com